


LTE CAT M1/NB1 TRACKER

For ASSET



MODEL: GPT12-L

User Manual

<GPS + GSM/GPRS/SMS + LTE CAT M1+ LTE NB1>

Long Standby Tracking System

CATALOG

I. Product Features.....	4
II. Components and Accessories.....	6
III. SIM Card Installation.....	7
IV. Test & Installation.....	8
4.1 Power on/off.....	8
4.2 LED Indicators.....	8
4.3 Install Device.....	9
V. Setting & Inquiry.....	10
5.1 Web Platform & APP.....	10
5.2 SMS.....	11
VI. Trouble shooting.....	11
6.1 Cannot connect platform.....	11
6.2 Offline status.....	11
6.3 No positioned.....	12
6.4 Position drift.....	13
6.5 Commands receiving abnormally.....	13
VII. Warranty Rules.....	13
7.1 Special statement.....	13
7.2 Warranty period.....	14
7.3 After sales.....	14

Welcome to use our device , please read this manual carefully to install and operate device exactly. This user manual is for reference only. If some contents and operation steps are inconsistent with those for the actual product, the latter will prevail.

With GPT12-L Long Standby GPS Tracker, we can monitor your vehicle or asset by GPS satellite positioning system, GPRS/LTE CAT M1/LTE NB1 communication and Internet, remote location of vehicles or asset can be achieved through a powerful service platform. It plays a significant role in logistics and asset protection, helping customers to achieve transparent management, reduce costs, ensure safety, and improve efficiency.

I. Product Features


- Precise positioning by GPS, GLONASS, BeiDou/Compass, Galileo, QZSS
- Support GSM/ LTE CAT M1/ LTE CAT NB1.
- Smart and thin, easy to hide for installation.
- Built-in 4500mAh zero self-discharge lithium Manganese disposable battery
- Start Emergency mode, device will start real-time tracking and uploaded data through GPRS/ LTE CAT M1 regularly
- In Long Standby mode, device can stand up to 3 years(Power on once per day)
- Track device through WEB/APP/SMS
- EELINK protocol 2.0, Firmware OTA

Basic Specifications

Voltage	3.6V
Work Current	LTE CAT M1(124~265mA); LTE NB1 (65mA~78mA)
Standby Current	10uA
Positioning Accuracy	5-15m
GPS Band	1575MHz
EGPRS Band	850/900/1800/1900MHz
CAT M1/ CAT NB1 Band	LTE FDD: B1/B2/B3/B4/B5/B8/B12/B13/ B18/B19/B20/B26/B28 LTE TDD: B39 (for Cat M1 Only)
Hot/warm/cold Start	<3s, <15s, <60s
Battery Capacity	4500mAh
Dimensions (mm)	96(L)X 50(W) X 11.2(H)
Working Temperature	Arrange -20°C~65°C
Work Humidity	20%~80%RH
Net Weight	65g

II. Components and Accessories

■ Components




-Top Front-
(Towards sky)



-Bottom -


■ Accessories




3M Velcro (default)

III. SIM Card Installation

Open the packing case, check if device is OK and accessories are intact

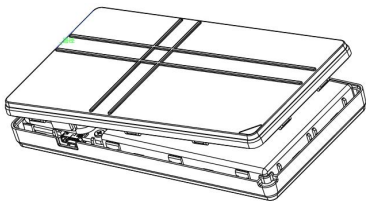

Open device cover



Insert SIM Card


Note:

- Please power off device before installing or uninstalling SIM card.
- Open SIM's traffic transmission to send data.

- If the PIN code of SIM card enable, please use your mobile phone to disable the PIN code.
- Please make sure SIM card has sufficient balance.

IV. Test & Installation

4.1 Power on/off

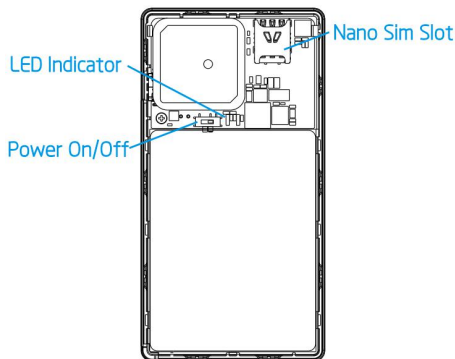

After SIM installation, Turn on/off the power switch, device will power on/off.

4.2 LED Indicators

The **Red LED** flickers fast when device is searching for GSM/Cat M1/Cat NB1 network, it flickers slowly when device has registered network successfully.

The **Blue LED** flickers fast when device is searching for the Positioning satellite signal, it flickers slowly when device has searched the satellites and can be positioned.


1. **RED LED**(indicates Network working state)

Fast blinking	Searching for GSM/Cat M1/Cat NB1 network
Slow blinking	GSM/Cat M1/Cat NB1 works normally

2. **BLUE LED**(indicates GPS Satellite signal state)

Fast blinking	Searching GPS Satellites
Slow blinking	GPS works normally

4.3 Install Device



Close device cover, Stick Velcro to bottom of GPT12-L and install it.

V. Setting & Inquiry

5.1 Web Platform & APP



5.1.1 Web Browser platform

Login the service platform to set or track device, ask your dealer for the WWW address

5.1.2 Smart phone application

Use smart phone APP, ask your dealer to get installation package.

Example, Remotely configuration by Keelin APP

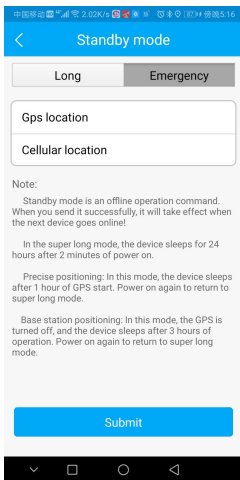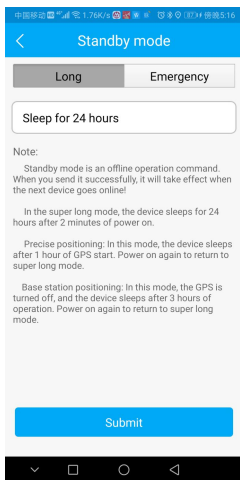

5.2 SMS

You can write a positioning SMS sending to device to inquiry position, device will reply position SMS or map link once it wake up. You also can set administrator number to get remove alarm.

The SMS commands please refer to the Operation Commands.

VI. Trouble shooting

6.1 Cannot connect platform

Device is never online on the position server when installed at the first time. Please check device:

- 1) If power cables are wired correctly? Pay attention to not connect them to controlling cables of vehicle.
- 2) If SIM card is installed correctly? Please refer to the installation instructions.
- 3) Check status of LED indicators. If device is OK, red and blue LED will intermittently and slowly flick.
- 4) Inquiry parameters of device via commands and check replied parameters.

6.2 Offline status

First check if LED indicators are OK, if cannot

check them, you can check SIM card following next steps:

- 1) call SIM card of device and check if you can hear connecting ring.
- 2) Check if vehicle is in the area where there is no GSM/WCDMA signal.
- 3) Check if one device or all devices are offline in the area . If all devices are offline, you should ask operator If network is OK.
- 4) Check if SIM card has enough balance.
- 5) If device becomes offline on the last day of one month, please check data transferring is closed or not.
- 6) Inquiry parameters of device via commands and check replied parameters.

6.3 No positioned

If the GPS is active, but device cannot be positioned for long time, please check device:

- 1) If the vehicle is in the place where there is no GPS signal.
- 2) The upside of device should be installed with face toward the sky.
- 3) The GSM/WCDMA and GPS signal may be

weakened if device is installed in the place with electromagnetic wave absorption material (such as metal blocks), special attention should be paid if there is metal thermal insulation layer or heating layer on the front windshield, so that the position accuracy will decline, and the severe ones will not be positioned.

6.4 Position drift

Serious position drift will be found in places where GPS signal is poor. Please drive the vehicle to the open places.

6.5 Commands receiving abnormally

- 1) Check the commands format.
- 2) Check if the vehicle is in the places where there is GSM signal.
- 3) Check if the SIM card is properly installed.

VII. Warranty Rules

7.1 Special statement

- 1) Technology change without notice.
- 2) If the color and appearance are inconsistent with those for the actual product, the latter will prevail.

- 3) Warranty card is only valid for devices with the following IMEI.
- 4) Please take care of the warranty card and show it with the original purchase receipts when enjoying the warranty service.

7.2 Warranty period

Since the date of purchase, passive waste host has one year warranty.

7.3 After sales

Any of the following circumstances not covered by the warranty, but may be appropriate to pay repair:

- 1) More than the warranty period.
- 2) Unauthorized removal or repair damaged.
- 3) Damage caused by improper installation, use, maintenance, custody.
- 4) IMEI label is torn or Obscure.
- 5) Warranty certificate and product models do not match or warranty certificate be altered.
- 6) Damage caused by force majeure.